



20 YEAR GUARANTEE – Circular Soffit Vents

Blue Building Solutions Ltd. t/a VENT guarantees that Circular Soffit Vents supplied by VENT will retain their mechanical function for a period in excess of 30 years, under natural conditions, from the date of purchase. Provided the Circular Soffit Vents are installed in accordance Design & Specification Guides supplied by VENT.

VENT guarantees Circular Soffit Vents under the following terms & conditions:

- a. This guarantee is given to consumers as defined in and who have the rights under the Consumer Guarantees Act 1993 and should be read with the statutory consumer guarantees contained in that Act.
- b. This guarantee will apply to defects appearing within 30 years from the date of purchase & where notification of defects is received in writing within 28 Days of the defect appearing.
- c. Guarantees will only be honoured if the VENT products in question were installed, used and maintained in accordance with VENT installation guides all of which are available on www.eboss.co.nz and on the VENT website www.vent.nz
- d. Guarantees will not apply to damage caused by external physical agents, accidental damage or other Force Majeure.
- e. The sole & exclusive remedy with regard to the above Guarantee is limited to the repair or supply of replacement profiles at VENTs discretion

This guarantee shall be construed and interpreted in accordance with New Zealand Law and shall be subject to the jurisdiction of New Zealand Courts only.

This Guarantee does not affect the statutory rights of consumers.

Control of Condensation in Buildings

Product Information Sheet


Circular Soffit Vents – G700

Description

Circular Soffit Vents can be utilised for new build projects but are most commonly used as the easiest solution for existing soffits on houses with condensation problems. Standard fixing for this product is a simple push twist action into a 70mm hole drilled in the soffit board.


The vent features evenly spaced 4mm slots small enough to prohibit large insects gaining access but wide enough not to be blocked by debris, paint or water droplets.

This product should be used in conjunction with the Roll Panel Vent (G502) or Eaves Vent (EV25) to ensure continuous airflow into the roof void.

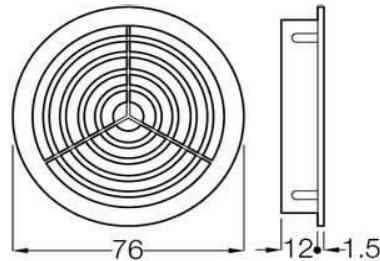

Product Specification

- 2150mm² of airflow per G700 unit
- To achieve 10,000mm²/m of free airflow, the G700 should be fitted at 200mm centres
- To achieve 25,000mm²/m of free airflow, the G700 should be fitted at 86mm staggered centres
- Push fit into 70mm diameter hole in soffit board

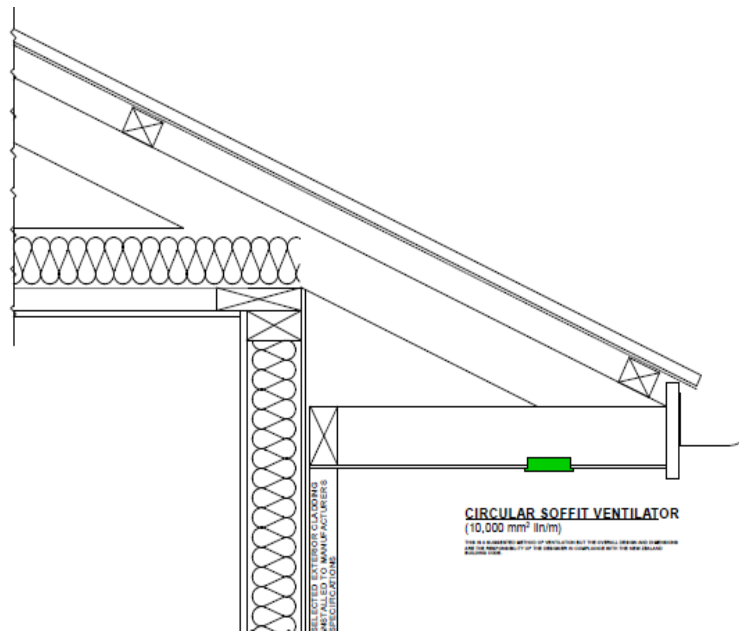

Note: These diagrams are for guidance purposes only. The overall design is the responsibility of the designer as there are often other factors to consider.