



30 YEAR GUARANTEE –Vented Batten

Blue Building Solutions Ltd. t/a VENT guarantees that Vented Batten supplied by VENT will retain their mechanical function for a period in excess of 30 years, under natural conditions, from the date of purchase. Provided the Vented Batten are installed in accordance Design & Specification Guides supplied by VENT.

VENT guarantees Vented Batten under the following terms & conditions:

- a. This guarantee is given to consumers as defined in and who have the rights under the Consumer Guarantees Act 1993 and should be read with the statutory consumer guarantees contained in that Act.
- b. This guarantee will apply to defects appearing within 30 years from the date of purchase & where notification of defects is received in writing within 28 Days of the defect appearing.
- c. Guarantees will only be honoured if the VENT products in question were installed, used and maintained in accordance with VENT installation guides all of which are available on www.eboss.co.nz and on the VENT website www.vent.nz
- d. Guarantees will not apply to damage caused by external physical agents, accidental damage or other Force Majeure.
- e. The sole & exclusive remedy with regard to the above Guarantee is limited to the repair or supply of replacement profiles at VENTs discretion

This guarantee shall be construed and interpreted in accordance with New Zealand Law and shall be subject to the jurisdiction of New Zealand Courts only.

This Guarantee does not affect the statutory rights of consumers.

Control of Condensation in Buildings

Product Information Sheet


Ventilated Batten – VB20

Description

Ideal product for residential skillion roofing design and commercial buildings. Can be used horizontally on roofs and vertically on walls to ventilate cavities.

The VB20 is a Polypropylene Ventilated Batten which provides a continuous 20mm passive airflow. This will enable the movement and release of warm air which can eliminate condensation in the roof void and wall cavity. The VB20 is designed as a dual-purpose product providing the following benefits:

- ✓ Peel-off adhesive backing for temporary fixing, hence reducing labour time/cost
 - ✓ It is manufactured with recommended 4mm vents which make it ideal as a roof perimeter batten as it will repel the ingress of nesting insects.
 - ✓ The VB20 is also designed to provide a strong, durable purlin vent to allow passive airflow throughout the entire roof area.
 - ✓ When used as a purlin batten, the VB20 has been upgraded in strength and tested to exceed foot traffic weight requirements on the roof above.
 - ✓ The VB20 can also be used on walls to create vertical or horizontal ventilation flows.
- (Note: "Cavity Battens must be between 18mm and 25mm, and they must be at least 45mm wide".)*

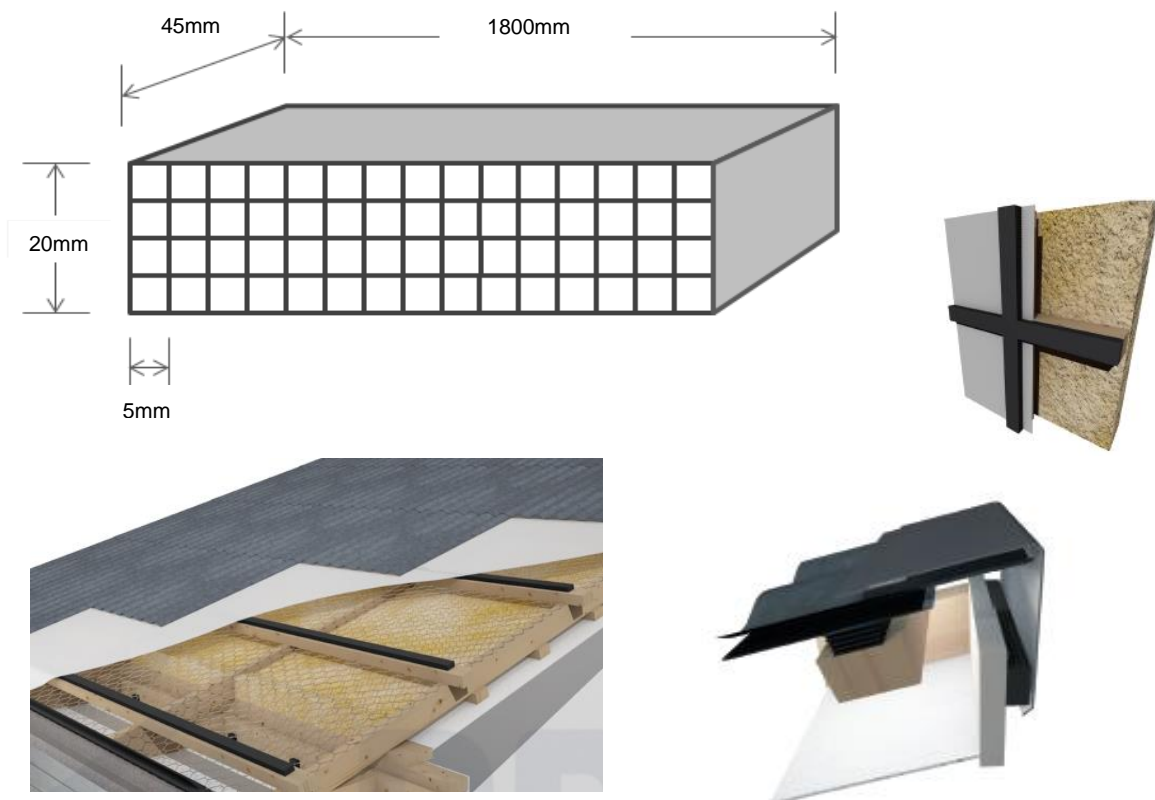

Note: These diagrams are for guidance purposes only. The overall design is the responsibility of the designer as there are often other factors to consider.